N/C Info File BIA Engr Dist File 9-13-89

86-89

RESOLUTION AUTHORIZING ENTERING INTO INTERGOVERNMENTAL AGREEMENT FOR THE PURCHASE, INSTALLATION, AND MAINTENANCE OF CULVERTS ON CERTAIN PUBLIC ROADWAYS

WHEREAS, Navajo County is a party in the above referenced Intergovernmental Agreement, and

WHEREAS, this Agreement was approved by the Navajo County Board of Supervisors in open session on September 5, 1989, and

WHEREAS, the total cost approved for installation of said culverts is $30,105.50, as shown by the attached cost analysis by the Chinle Agency Branch of Road Maintenance,

THEREFORE BE IT RESOLVED that the Navajo County Board of Supervisors is hereby authorized to enter into the Intergovernmental Agreement with the Navajo Nation for the Purchase, Installation, and Maintenance of Culverts on the Navajo Indian Reservation.

ADOPTED this 11th day of September, 1989.

NAVAJO COUNTY BOARD OF SUPERVISORS

Larry A. Layton
Chairman of the Board

ATTEST:

Sharon R. Keene
Sharon R. Keene
Clerk of the Board

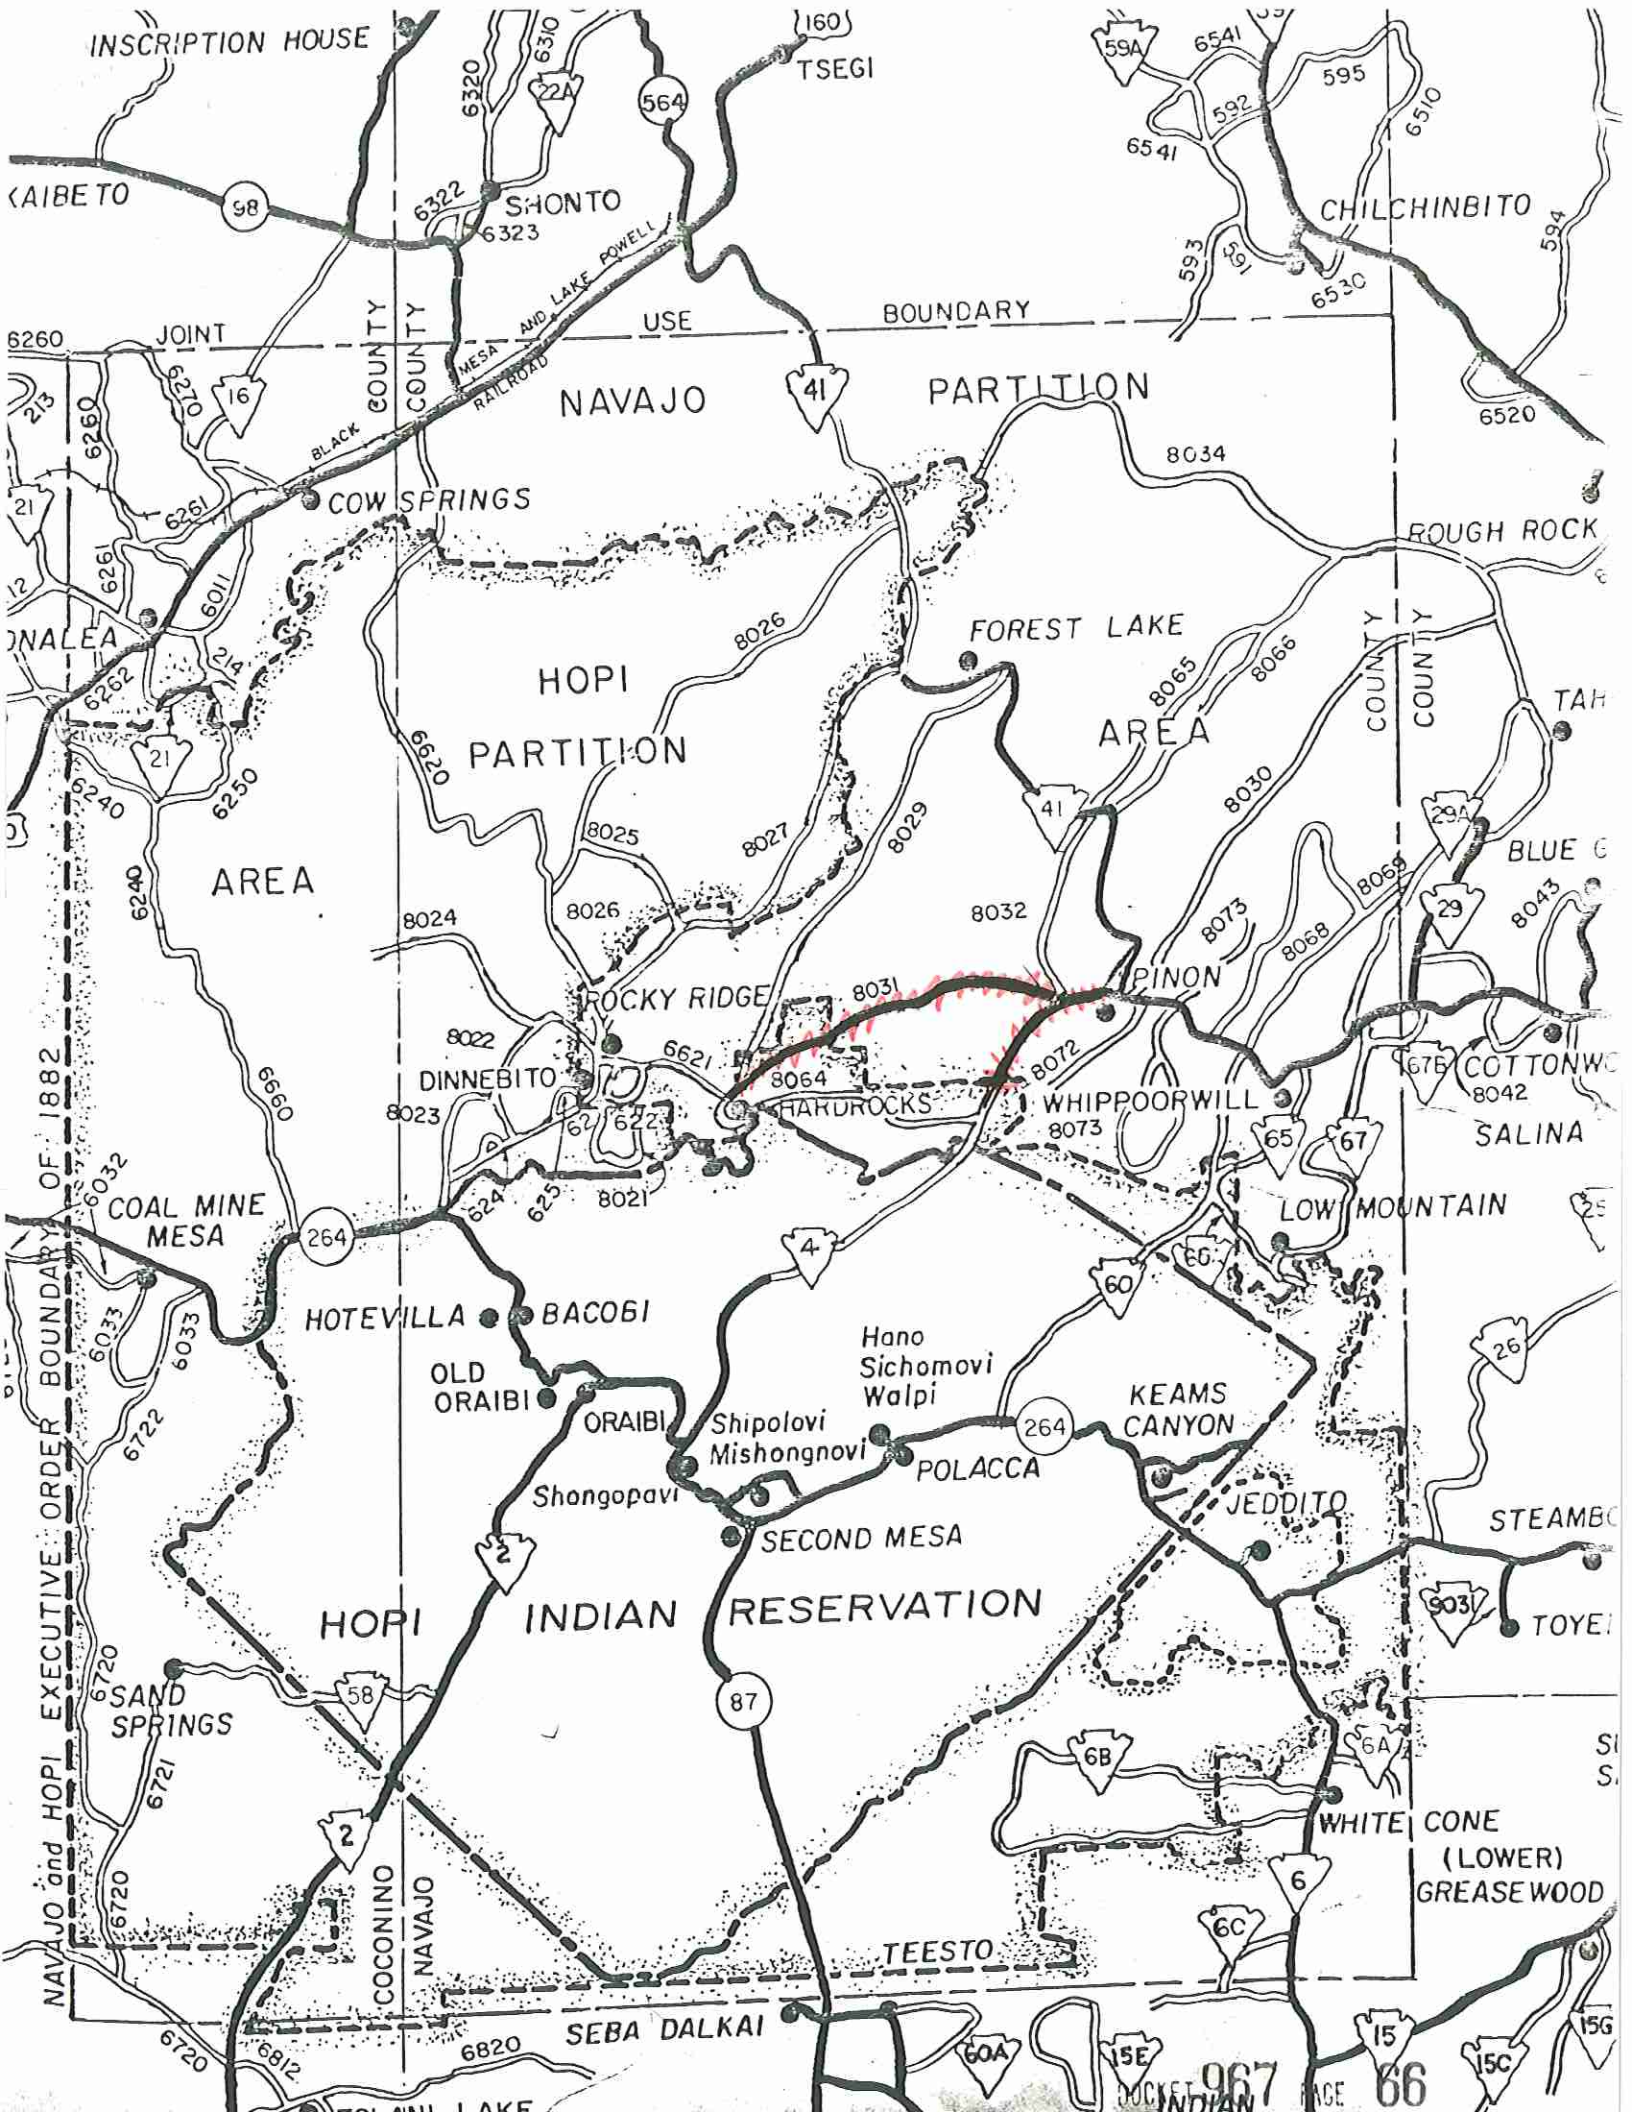
INSCRIPTION HOUSE
TSEGI
KAIBETO
SHONTO
CHILCHINBITO
JOINT USE BOUNDARY
NAVAJO PARTITION
HOPI PARTITION AREA
COW SPRINGS
ROUGH ROCK
FOREST LAKE
ROCKY RIDGE
PINON
DINNEBITO
HARDROCKS
WHIPPOORWILL
COTTONWOOD
SALINA
LOW MOUNTAIN
COAL MINE MESA
HOTEVILLA
BACOBI
OLD ORAIBI
ORAIBI
Hano
Sichomovi
Walpi
Shipolovi
Mishongnovi
POLACCA
KEAMS CANYON
JEDDITO
Shongopavi
SECOND MESA
HOPI INDIAN RESERVATION
SAND SPRINGS
WHITE CONE
(LOWER) GREASEWOOD
TEESTO
SEBA DALKAI
NAVAJO and HOPI EXECUTIVE ORDER BOUNDARY OF 1882
COCONINO COUNTY
NAVAJO COUNTY
BLACK MESA AND LAKE POWELL RAILROAD

Chinle Agency
Branch of Road Maintenance

CULVERTS

FY 89

ROUTE	24" X 30'	30" X 30'	36" X 30'	48" X 20'	60" X 20	72" X 20'	B A N D S			COST Per ROUTE
	16 ga.	16 ga.	16 ga.	16 ga.	12 ga.	12 ga.	48"	60"	72"	
4	2	5	6	4	4	8	4	4	-0-	$15,154.5
8031	8	7	-0-	6	8	-0-	4	4	4	$14,951.0
TOTAL	10	12	6	10	12	8	8	8	4	
FEET	300'	360'	180'	200'	240'	160'				
COST per ft.	10.50/ft	13.25/ft	15.75/ft	21.25/ft	42.25/ft	48.25/ft	21.25 ea.	42.25 ea.	48.25 ea.	
					TOTAL COST	$30,105.50				

DOCKET 967 PAGE 67

Culvert to be installed on System Route #4
Hopi Line toward Pinon

	Mileage	Culverts
Beginning 11299.65		
	11300.20	1 - 30" X 30'
	11300.55	1 - 60" X 40'
	11301.35	2 - 72" X 40'
	11301.5	1 - 30" X 30'
	11302.3	1 - 24" X 30'
	11302.4	1 - 36" X 30'
	11302.8	1 - 36" X 30'
	11302.9	1 - 36" X 30'
	11303.25	2 - 30" X 30'
	11303.4	1 - 48" X 40'
	11303.55	1 - 60" X 40'
	11303.7	2 - 36" X 30'
	11304.2	1 - 30" X 30'
	11304.65	2 - 72" X 40'
	11305.65	1 - 36" X 30'
	11306.55	1 - 24" X 30'
	11307.6	1 - 30" X 30'
Ending 11308.85		

Total Miles: 9.2

Total: 21 - (2) 24" X 30'
(6) 30" X 30'
(6) 36" X 30'
(1) 48" X 40'
(2) 60" x 40'
(4) 72" x 40'

Culverts to be installed on System Route #8031
Pinon toward Hard Rock

	Mileage	Culvert size
Beginning	11268.4	
	11268.45	1 - 24" X 30'
	11268.95	1 - 24" X 30'
	11269.65	1 - 30" X 30'
	11270.3	1 - 30" X 30'
	11270.6	1 - 30" X 30'
	11271.15	1 - 24" X 30'
	11272.3	1 - 60" X 40'
	11272.8	1 - 48" X 40'
	11273.0	1 - 60" X 40'
	11273.25	1 - 24" X 30'
	11273.7	2 - 48" X 40'
	11274.3	1 - 60" X 40'
	11275.8	1 - 30" X 30'
	11276.1	1 - 24" X 30'
	11276.6	1 - 60" X 40'
	11276.9	1 - 30" X 30'
	11277.25	1 - 24" X 30'
	11281.2	1 - 24" X 30'
	11281.6	1 - 24" X 30'
	11282.1	1 - 30" X 30'
Ending	11283.9	

Total Miles: 15.5

21 Culverts - (8) 24" X 30'
(6) 30" X 30'
(3) 48" X 30'
(4) 60" X 40'

MICROFILMED
INDEXED

89 13335

FEE # _____
RECORDED AT THE REQUEST OF
Board of Supervisors
ON SEP 13 '89 - 9 45 AM
IN DOCKET 967 PAGE(S) 65-69 incl.
OFFICIAL RECORDS OF NAVAJO COUNTY, ARIZONA
JAY H. TURLEY, RECORDER